


10P Panel

10 position chain-link multi-panel used to feed any combination of 10 receptacles from 15 to 50 amps. It has an ampacity rating up to 200 amps 3 ph depending on outlet configuration.

Clifford Identification Numbers

10P/FP2-01	10P/FP2-02	10P/FP2-03	10P/FP2-04	10P/FP2-05

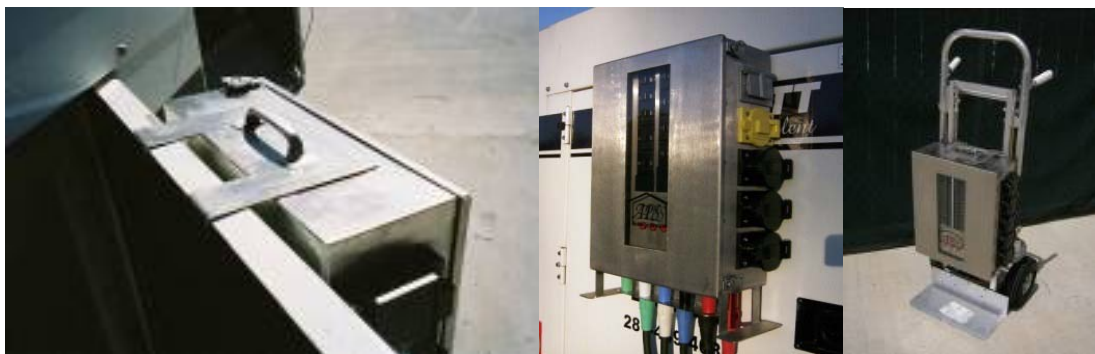



- *Electrical Connections:*
 - *400 amp 3 phase cam-lok inlets and outlets for chain linking more panels or feeding another item. Outlet is protected by a hinged cover.*
 - *(9) 120 volt 3 phase twist lock receptacles (L21-20) suitable for quad box strings and optional 5 wire extensions. Each phase protected by its own GFI 20 amp circuit breaker*
 - *With all quad box strings connected a total of 27 duplex receptacles are available*
 - *(One) 50 amp 120/240 volt single phase twist lock.*
- *3 individual “phase on” high intensity LED pilot lamps.*
- *Panels are available w/ an aluminum dolly stand which can be setup for vertical or horizontal use.*
- *Panel can be removed and has a hook used to hang the unit on a generator door or over anything with 1 1/2" lip.*
- *Stainless carrying handle welded on top w/ hook.*
- *Enclosure and all hardware are stainless steel.*
- *Break-resistant polycarbonate window.*
- *Use dolly to store panel or place panel away from generator.*
- ***Sizing for full amperage requires a 125 kVA generator at 120/208 volt***