


MQ Power DCA-300SSK3

From stationary standby power sources to mobile construction applications, MQ Power's WhisperWatt portable generators will meet your most demanding requirements.

WhisperWatt generators have been engineered to provide the highest reliability and maximum motor starting capability.

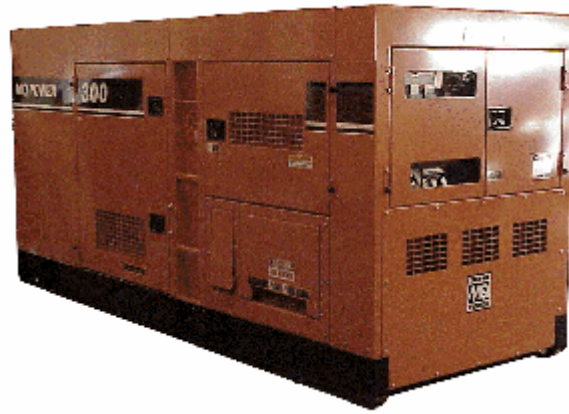

Performance Data		
Standby Output	264 kW , 330 kVA	
Prime Output	240 kW , 300 kVA	
Generator RPM	1800 RPMs	
Generator Design	Revolving Field Self-Ventilated Dip-Proof Single Bearing	
Voltage Regulation - (No Load to Full Load)	1 %	
Power Factor	0.8	
Armature Connection	Star with Neutral	
Excitation	Brushless with AVR	
No. Poles	4 Pole	
Frequency	60 Hz	
Available Voltages - 3 Phase	208, 220, 240, 416,440, 480 Reconnectable Volts	
Available Voltages - Single Phase	120, 127, 139, 240, 254, 277 Adjustable Volts	
Amps - Single Phase 120V	666.7 (4 Wire) Amps	
Amps - Single Phase 240V	333.3 (4 Wire) Amps	
Amps - Three Phase 240V	722 Amps	
Amps - Three Phase 480V	361 Amps	
Insulation	Class F	
Main Breaker Amps	800	
Sound Level dB(A) - Full Load at 23 feet	71 dB(A)	
Power Source		
Engine Make / Model	Komatsu SA6D125E-3	
Fuel Consumption	17.5 gal/hr full load	12.0 gal hr ³ / ₄ load
	8.8 gal hr ¹ / ₂ load	5.5 gal hr ¹ / ₄ load
Fuel Tank Capacity	129 Gal Internal	250 Gal Trailer
Dimensions		
Overall Length	Without Trailer	
	153 in. , 389 cm	240 In.
	With Trailer	
Overall Width	55 in. , 140 cm	84 In.
Overall Height	71 in. , 180 cm	102 In
Approx. Net Wt. Dry	9415 lbs. , 4270 kg.	14,000 includes fuel